

HDPE tvarovky: elektrofúzna 45° prechodka ocel/ PE 100




Objednávkové č.: 21.67

d _n	zvariteľnosť				
	SDR 17 - S8		SDR 11 - S5		SDR 9 - S4
	PE 80	PE 100	PE 80	PE 100	PE 80
32	● ▲	● ▲	●	●	●
40	● ▲	● ▲	●	●	●
50	● ▲	● ▲	●	●	●
63	●	●	●	●	●

- zvariteľné len EURO monovalentnou elektrofúznou jednotkou
- ▲ zvariteľné pri hrúbke steny min. 3 mm

Objednávkové č.: 21.68 (s vnútorným závitom)

d _n	G	rozmery				hmotnosti	
		L	f	Z	c _h	cod. 21.67 - vonkajší závit	
						PE 100 - PN 16 - S5	
32	1"	43	33	92	36	275	
40	1" 1/4	48	32	102	45	425	
50	1" 1/2	54	33	109	52	630	
63	2"	52	40	125	67	1015	

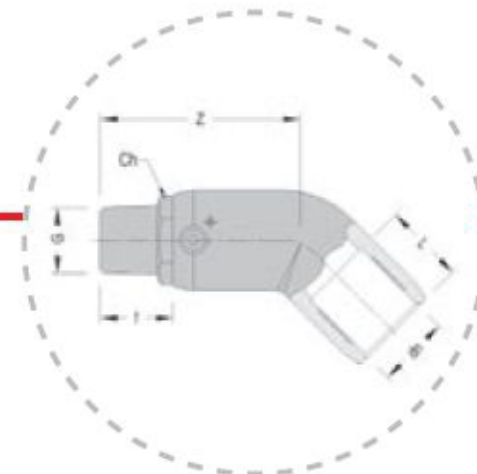

d _n	G	rozmery				hmotnosti	
		L	f	Z	c _h	cod. 21.68 - vnútorný závit	
						PE 100 - PN 16 - S5	
32	1"	43	25	84	40	305	
40	1" 1/4	48	50	119	50	410	
50	1" 1/2	54	56	132	56	600	
63	2"	52	35	120	67	965	

