


HDPE tvarovky: Kolená 90° PE 100



- **kompatibilita pri zvaraní na tupo:** garantovaná pre rôzne PE, ale s rovnakou hrúbkou steny
- **kompatibilita pri elektrofúznom zvaraní:** garantovaná pre rôzne PE a rôzne hrúbky steny.

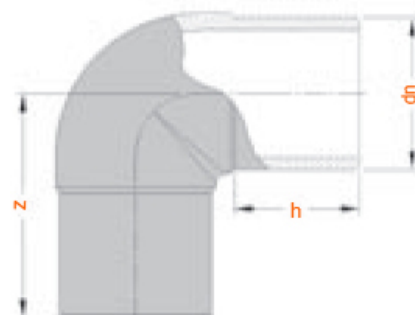

- Neodporúčame zvaranie na tupo pri priemeroch < 63 mm

dn	rozmery		hmotnosti			
			PE80	PE100	PE100	PE100
			SDR 17 - S8		SDR 11 - S5	SDR 7,4
h	Z	PN 8	PN 10	PN 16	PN 25	
20	49	75	●	●	30	●
25	61	80	●	●	45	●
32	60	81	●	●	55	65
40	60	85	65	●	80	100
50	60	89	90	●	130	175
63	66	100	155	●	235	310
75	71	114	245	●	345	400
90	81	130	●	390	550	650
110	85	146	●	650	900	1270
125	90	159	●	915	1330	1840
140	95	172	●	1285	1795	2500
160	114	225	●	2155	3000	4110
180	120	238	●	2675	3985	●
200	127	248	●	3335	5235	●
225	137	285	●	4300	6870	●
250	140	309	●	7100	10350	●
280	●	●	●	12100 ●	18600 ●	●
315	167	386	●	12440	18750	●
355	●	●	●	●	●	●
400	●	●	●	●	●	●

- nie je k dispozícii
- na požiadanie
- segmentová tvarovka